

## Light Transmission

### SunSky® Polycarbonate Sheeting Comparison Chart

		% Light Transmission
1001	Clear / Maximum light	90%
	Bronze Tint / Lots of light & slightly tinted	46%
	Grey Tint / Lots of light & slightly tinted	24%
2001	Clear / Maximum light	90%
	Bronze / Direct light & darker Bronze tint	25%
	Grey / Direct light & natural Grey tint	20%
	Opal / Diffused light & good shading	45%
	Cream / Soft light & low glare	44%
3001	Diffused Ice / Diffused light & low glare	48%
	Diffused Grey / Diffused light & low glare	20%
	Sandune / Max heat reduction & minimal glare	15%
	Metallic Jasper / Maximum heat reduction & minimal glare	15%

## ACCESSORIES

### Self Drilling Screws



### Purlin Tape



### Back Channel Infill Tape



### Capping



### Profiled Infills



OneShot® fixing features a Class 4 coating for superior corrosion resistance.

Self Drilling Screws can save up to 50% installation time.

## Handling and Storage

- Store sheets on a flat surface in a well-protected and shaded area out of direct sunlight.
- Sheets stacked / stored in the sun will be affected by heat build-up and possible distortion. Any damage caused by this will void the warranty.
- Take care to avoid moisture build up between stored sheets which can cause possible whitening of the sheets.
- Ensure sheets are free from any chemical, paint solvents and sealant contact (including silicone type products) as these type of products are incompatible with polycarbonate sheeting.
- Sheets may be cleaned with warm soapy water and a soft sponge. Hose down thoroughly – ensure all possible safety precautions are taken.

## Product Warranty

- Lifetime Warranty against loss of light transmission
- Lifetime Warranty against UV affected colour distortion
- Warranty against hail damage

FULL WARRANTY TERMS AND CONDITIONS AVAILABLE FROM [www.palram.com.au](http://www.palram.com.au)

## Safety

Never walk directly on SunSky®, or any other polycarbonate sheets. Use a board placed across at least 3 rafters to spread the load.

Ensure all local safety building regulations and codes are adhered to.

\* Front page picture courtesy of ProForm Pergolas



#### PALRAM SA/NT

517A Cross Keys Road  
Cavan SA 5094  
Tel: (08) 8262 2288  
Fax: (08) 8262 3388  
salessa@palram.com

#### PALRAM NSW/ACT

Unit 2 / 26 Redfern Street  
Wetherill Park NSW 2164  
Tel: (02) 8788 6100  
Fax: (02) 8788 6199  
salesnsw@palram.com

#### PALRAM QLD

Unit 9C / 380 Bilsen Road  
Geebung QLD 4034  
Tel: (07) 3172 5581  
Fax: (07) 3172 5516  
salesqld@palram.com

#### PALRAM VIC/TAS

34 Buys Court  
Derrimut VIC 3030  
Tel: (03) 9219 4444  
Fax: (03) 9219 4455  
salesvic@palram.com

#### PALRAM WA

74 Christable Way  
Landsdale WA 6065  
Tel: (08) 9302 4173  
Fax: (08) 9302 5287  
saleswa@palram.com

In as much as Palram Industries has no control over the use to which others may put the material, it does not guarantee that the same results as those described herein will be obtained. Each user of the material should make his own tests to determine the material's suitability for his own particular use. Statements concerning possible or suggested uses of the materials described herein are not to be construed as constituting a license under any Palram Industries patent covering such use or as recommendations for use of such materials in the infringement of any patent. Palram Industries or its distributors cannot be held responsible for any losses incurred through incorrect installation of the material. In accordance with our company policy of continual product development you are advised to check with your local Palram Industries supplier to ensure that you have obtained the most up to date information.



©1997 Palram Industries Ltd. | SunSky is a registered trademark of Palram Industries Ltd.

Visit [www.palram.com.au](http://www.palram.com.au) or call one of our state offices for further information.



# SUNSKY®

## Profiled Polycarbonate Sheeting

RESIDENTIAL APPLICATIONS



relax...  
SunSky's got you covered

05/2015 The data in this publication supersedes previous releases. For the latest update refer to our website.



[www.palram.com.au](http://www.palram.com.au)

# SunSky® 1001

PALRAM SunSky Roofing is designed to compliment the enjoyment of your outdoor lifestyle. Ideal for multiple uses around the home, SunSky roofing offers 99.9% UV protection and is supported with a Lifetime Warranty.

- Lifetime Warranty
- 99.9% UV protection
- Available in Corrugated profile
- Ideal for general use  
i.e. shed skylights, carports and patio roofing



SunSky® 4 STAR PLATINUM WARRANTY

# SunSky® 2001

SunSky polycarbonate sheeting is a reliable and effective sheet with multipurpose uses for domestic application. Offering clients the benefits of strength, appeal and greater flexibility. SunSky polycarbonate sheeting is a clear front runner for your next project.

- Lifetime Warranty
- 99.9% UV protection
- Available in Corrugated, Greca and 5 Rib Profiles
- Modern colours
- Matches metal profiles



SunSky® 5 STAR DIAMOND WARRANTY

# SunSky® 3001

## Unrivalled Heat Reduction Technology

Solarsmart Selective uses the latest technology to keep the heat out whilst still giving excellent light transmission. Coupled with Palram's unique anti-glare technology and proven longevity, Solarsmart Selective is the number 1 heat reduction sheet in polycarbonate roofing.

- Lifetime Warranty
- Most technically advanced sheet available
- 99.9% UV protection
- Available in Corrugated and Greca Profiles
- Modern colours
- Matches metal profiles




SunSky® 5 STAR DIAMOND WARRANTY

1001

2001

3001

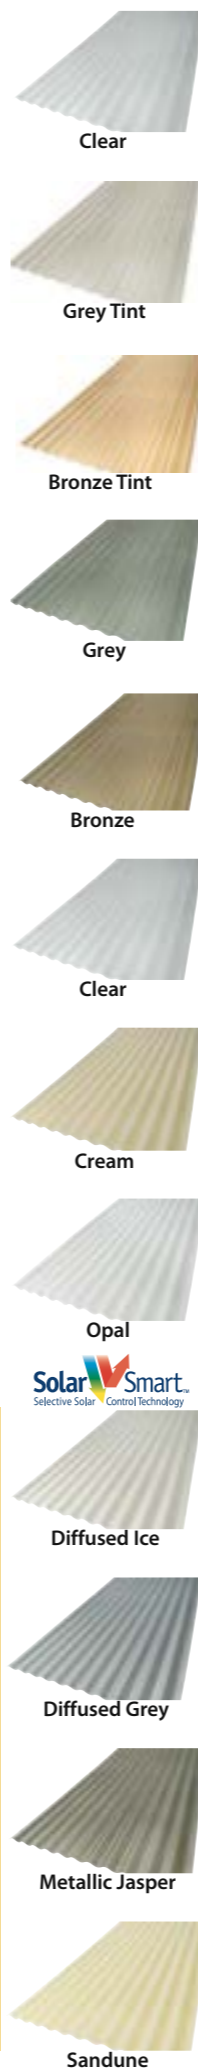


- UV PROTECTION
- STRENGTH IMPACT
- VERSATILITY
- HAIL
- FIRE RESISTANT
- 100% RECYCLABLE

## Installation Guidelines

### step 1


Purlins & accessories

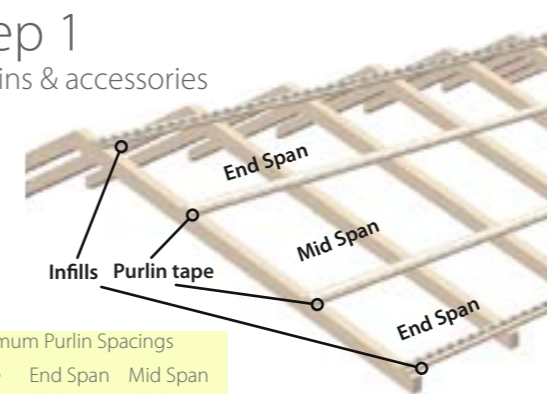

#### Maximum Purlin Spacings

Profile	End Span	Mid Span
Corri	800mm	1000mm
Greca	900mm	1200mm
5 Rib	900mm	1200mm

Ensure that your roof pitch is at least 5°, ie. 88mm rise per lineal metre. This will ensure adequate water run off.



### step 3

Capping & flashings for various installations

APEX ROOF - Fit barge capping to edge of sheet and ridge capping to the apex. Secure using recommended fixing screws

### step 2


Fixings



#### Fixing at crests:

Profile	End row	Mid Row
Corri	every 2 <sup>nd</sup>	every 3 <sup>rd</sup>
Greca	every 2 <sup>nd</sup>	every 3 <sup>rd</sup>
5 Rib	All	All

#### Overlap:

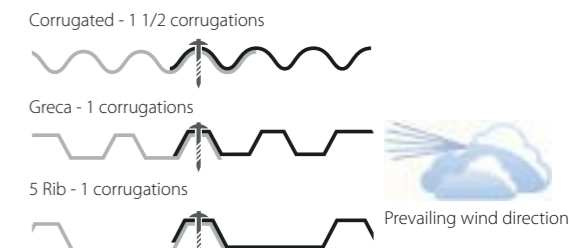

AGAINST A WALL/FASCIA - Fit barge capping to edge of sheet and apron flashing at the wall or fascia. Secure using recommended fixing screws.

UNDER A GUTTER - Fit Back channel flashing with foam infill strips under gutter prior to laying sheets and Barge Capping to edge of sheet.